

# PRODUCT OVERVIEW



## T-CLASS AIR-COOLED CHILLERS AE Design Series



**SMARTD**  
GLOBAL #1 IN OIL-FREE CHILLERS

## T-Class Air-Cooled Chillers

Smardt's T-Class of chillers utilize Smardt's oil-free chiller technology with Turbocor's TTS or TTH compressors using R134a refrigerant. T-Class Air-Cooled AE Design Series Chillers are available from 40 to 500 TR (140 to 1760 kW) and can be supplied in multiple configurations, which Smardt can customize per the requirements of your application.



A Smardt T-Class AE Design Series chiller

### T-Class AE Design Series

Smardt has brought its extensive experience in oil-free chiller development, sales and service into designing the T-Class — a range of air-cooled chillers that deliver the highest level of reliability, outstanding efficiency and the lowest total cost of ownership.

T-Class chillers offer valuable benefits to owners and operators, such as ease of installation, simple streamlined operation and maintenance, and lower lifetime operating and maintenance costs. These advantages are the hallmark of Smardt chillers.

### Oil-Free Operation

Smardt oil-free centrifugal chillers use magnetic bearings and a variable-speed drive to deliver IPLV efficiencies that far surpass those of conventional oil-lubricated centrifugal, reciprocating, scroll and screw chillers.

Smardt utilizes totally oil-free Turbocor compressor technology, achieving the highest part-load efficiencies for our chillers and chilled water systems (including water-, air- and evaporatively-cooled applications).

Proprietary magnetic bearings replace conventional oil-lubricated bearings. This eliminates the high friction losses, mechanical wear, and the higher-maintenance oil management systems that are inherent with conventional compressor designs.

Turbocor's primary moving part (the rotor shaft and impellers) is levitated during rotation by a digitally controlled magnetic bearing system. Position sensors at each magnetic bearing provide real-time feedback to the bearing control system, 120 times each revolution, ensuring constantly centered rotation.

The result is oil-free operation that delivers significant chiller energy savings compared with standard chillers, and provides an extended service life without the efficiency decrease seen in oil-based systems.

### Global Number One


Smardt is the industry leader in oil-free centrifugal chillers. Smardt pioneered oil-free centrifugal compressor technology to provide plant owners and operators a line of chillers that broke through industry norms of lifetime performance, energy conservation (reducing operating expenses), streamlined maintenance, and ease of operation.

From our first oil-free centrifugal chiller in 2002, more than 10,000 Smardt chillers, from 60 TR up to 3200 TR, are now saving money, energy and CO<sub>2</sub> emissions across the globe.

# T-Class Air-Cooled Chillers, AE Design Series



# T-Class Air-Cooled Chillers, AE Design Series

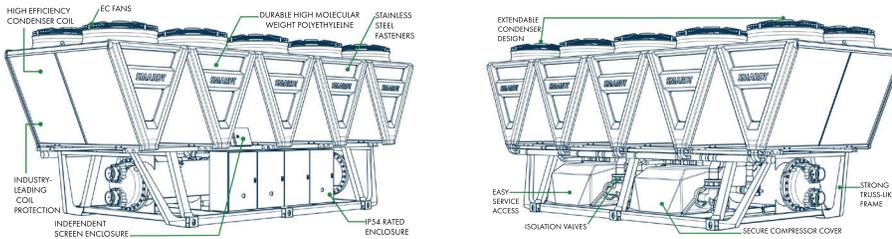

Side and front views of a Smardt T-Class AE Design Series chiller

## Innovative Base Frame

Smardt's T-Class AE series chillers sit atop a newly design base frame that provides the T-Class chiller with the industry's smallest footprint for air-cooled chillers. This stainless steel space-frame type design is specially engineered and designed to be a rigid, lightweight platform for the T-Class chiller.

## Compressors & Refrigerants

Smardt's T-Class AE series chillers offers maximum flexibility to meet application and project requirements, utilizing either the Turbocor TTS or the high-lift TTH oil-free compressors. Both the TTS and TTH compressors use R134a or the low-GWP R513A refrigerants. VFDs are built-in, and drives are internal to the machine.\*



TTS Compressor



TTH Compressor

## High-Lift Conditions

The TTH compressor's expanded operating map enables it to operate

under demanding high-lift conditions up to 52 °C / 126 °F ambient temperatures, making it ideal for hot, dry climates.

## Reduced Sound

As oil-free compressors, both the TTS and TTH compressors feature significantly reduced vibration (up to 8dBA lower than screw compressors) and quiet operation—ideal for noise-sensitive applications.

## Extended Service Life

With either compressor, the T-Class chiller is designed for a service life of 25 years.

## Applications

Energy conscious plant owners and operators want optimized performance with savings over the life of the chiller. Smardt's T-Class AE series chillers support critical-load applications in a variety of markets, including commercial, data center, pharmaceutical, hospital, higher education, district cooling, hotels, malls, and manufacturing.

## Highlights

- Class leading part-load efficiencies, achieving optimum IPLV in total capacity range.
- Typically smaller footprint than chillers of comparable capacity.
- Advanced corrosion protection on critical operating surface areas for base frame and coils
- Quiet ECM fans on all units.
- Adaptable by design - a base range with options to suit any air-cooled application.
- Smardt's robust casing protects the condenser coils from the elements.
- Responsive chilled water control under all conditions.
- Inbuilt redundancy with multiple compressors.
- Designed for ease of maintenance and serviceability, featuring field-serviceable compressors.
- Smardt quality, acceptance tested and pre-commissioned prior to delivery, ensuring trouble-free commissioning and startup ensuring trouble-free commissioning and start-up on every project.


\*The Danfoss Turbocor TTS compressor can use R134a or R513A refrigerants. A Smardt T-Class chiller using R513A effectively becomes a G-class chiller.

# T-Class Air-Cooled Chillers, AE Design Series


Smardt's T-Class Air-Cooled Chillers, AE Design Series with full-load capacities of units with R134a refrigerant, ranges from 40 to 500 TR (140 to 1760 kW)

## Representative Models

Smardt can customize your T-Class AE Design Series chiller to meet your project's needs and specifications. The models included in this capacity cart are considered representative of the T-Class AE Design Series, but selection is not limited to these specific models. Your Smardt representative can provide capacity data for your project.

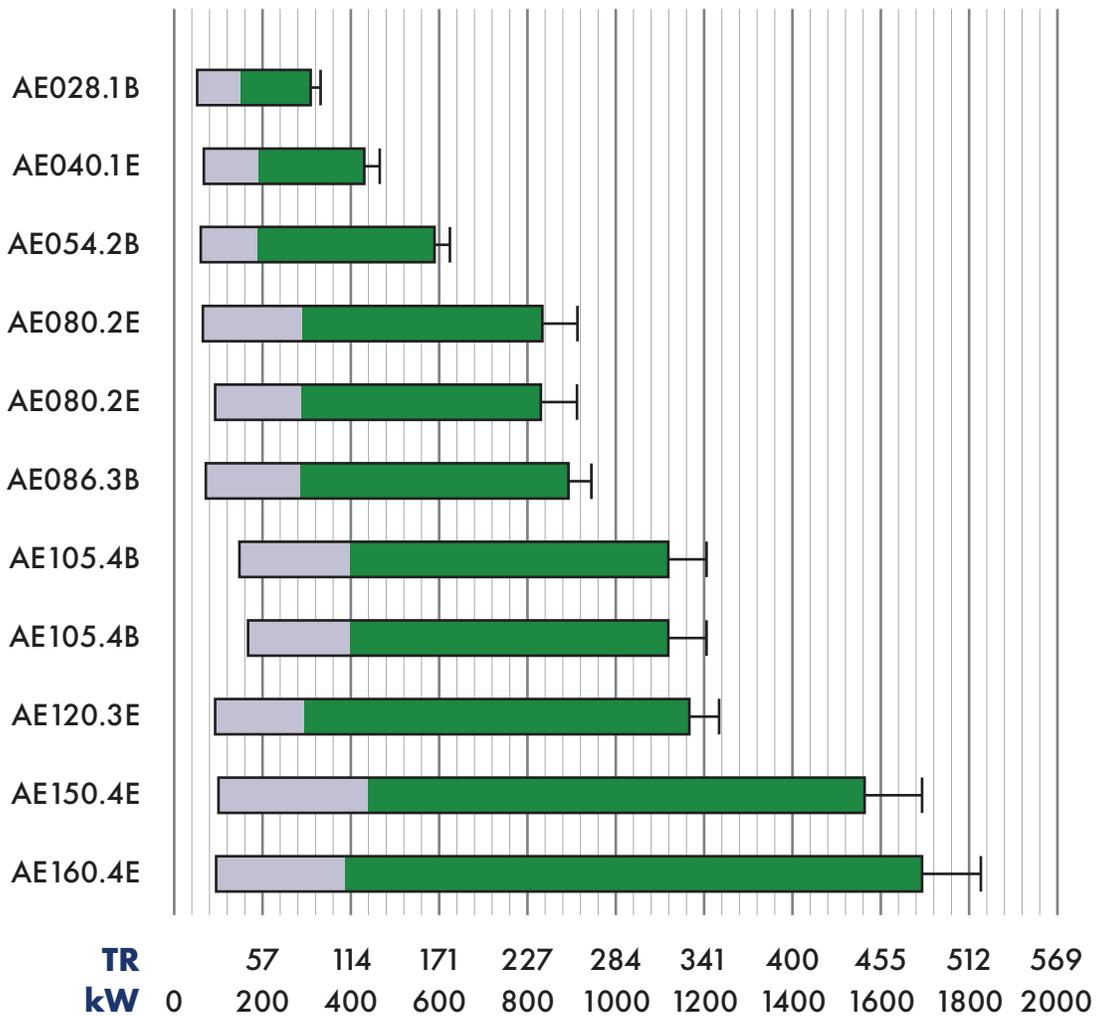


**Cooling Capacity TR (kW)**

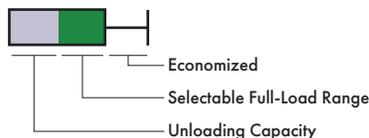

Note: Available cooling capacity will vary with operating conditions and chiller configuration. Capacities shown are based on standard AHRI conditions.

# T-Class Air-Cooled Chillers, AE Design Series

## Model Number Nomenclature

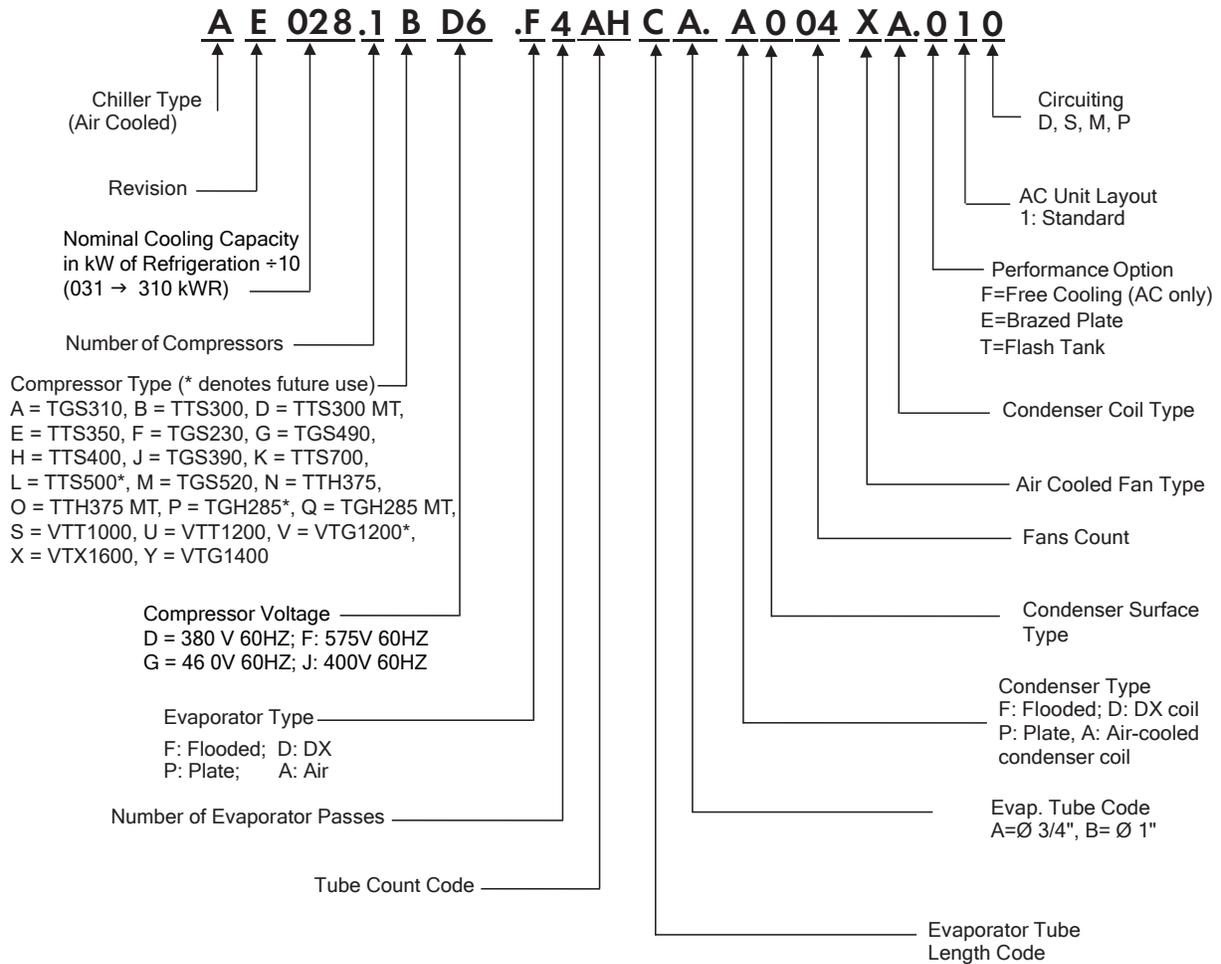

## Global reach, single focus

Smardt is both the pioneer and world-leader in oil-free centrifugal chillers, with production facilities in Canada (Montreal area), Australia (Melbourne area), United States (Plattsburgh, New York), Germany (Stuttgart area), and China (Guangzhou and Nanjing).

Smardt service networks extend across the globe to monitor and support the world's largest installed base of oil-free high-efficiency chillers, with more than 10000 chillers installed globally.



### AMERICAS

#### Canada

**Smardt Chiller Group Inc.**  
1800 Trans-Canada Highway  
Dorval, Quebec H9P1H7  
T +1 514 426 8989  
E [sales.ca@smardt.com](mailto:sales.ca@smardt.com)

#### USA

**Smardt Chillers Inc.**  
22 Colorado Street, Bldg 2815  
Plattsburgh, NY 12903  
T +1 518 324 5741  
E [sales.us@smardt.com](mailto:sales.us@smardt.com)

#### Brazil

**Mecalor Solutions (licensed partner)**  
Rua da Bandeira, 219-Novo Mundo Park  
São Paulo, Brazil  
T +55 11 2188 1700  
E [sales@mecalor.com](mailto:sales@mecalor.com)

### ASIA PACIFIC

#### Australia

**Smardt Chiller Pty Ltd**  
144 Colchester Road  
Bayswater North VIC 3153  
T +61 3 9761 7905  
E [sales.au@smardt.com](mailto:sales.au@smardt.com)

#### China

**Guangzhou Smardt Chillers Manufacturing Co. Ltd**  
Mei Xing Industrial Park  
No. 30 Dong Zhong Road ETDD  
Guangzhou  
T +86 20 8205 7161  
E [sales.cn@smardt.com](mailto:sales.cn@smardt.com)

**Guangzhou Smardt Chillers Manufacturing Co. Ltd, Nanjing Branch No. 2,**  
Hengxiang Road, Qixia Economic and Technological Development Zone, Nanjing, China  
T +86 25 8532 6977  
E [sales.cn@smardt.com](mailto:sales.cn@smardt.com)

**TICA Smardt Hong Kong Ltd**  
11/F, The Bedford, 91-93 Bedford Road  
Tai Kok Tsui, Kowloon, Hong Kong  
T +852 2772 8448  
E [hk.info@smardt.com](mailto:hk.info@smardt.com)

#### Singapore

**Smardt Chillers Pte Ltd**  
438A Alexandra Road #08-11  
Alexandra Technopark 119967  
T +65 6273 1120  
E [sales.as@smardt.com](mailto:sales.as@smardt.com)

### EMEA

#### Germany

**Smardt-OPK Chillers AG**  
Bahnhofstraße 74  
D73240 Wendlingen  
T +49 7024 79429 0  
E [sales.eu@smardt.com](mailto:sales.eu@smardt.com)  
[www.opk.de](http://www.opk.de)

#### United Kingdom

**Smardt Chiller UK**  
10A Burrell Way, Theford,  
Norfolk IP24 3RW  
T +44 1842 824830  
E [sales.uk@smardt.com](mailto:sales.uk@smardt.com)

Follow us.



[www.smardt.com](http://www.smardt.com)

Smardt has exercised its best efforts to ensure that the information contained in this document is correct at time of printing. However, no warranty, reliability or accuracy is given with respect to the information contained herein, and Smardt is not and shall not be responsible for any error or omission, or liable for the correctness or suitability of the information given. All brand names and product names used in this manual are trademarks, registered trademarks, or trade names of their respective holders.

© 2022, Smardt Chiller Group Inc. All rights reserved. 01/2022