

## PRODUCT OVERVIEW



### V-CLASS WATER-COOLED CHILLERS



**SMARTD**  
GLOBAL #1 IN OIL-FREE CHILLERS

# V-Class Water-Cooled Chillers

Smardt's V-Class Water-Cooled Chillers are large-capacity chillers that utilize Smardt's oil-free chiller technology with Turbocor's VTT or VTX compressors using R134a refrigerant. V-Class Water-Cooled Chillers are available from 300 to 3600 TR (1055 to 12660 kW) and can be supplied in multiple configurations, which Smardt can customize per the requirements of your application.



**A Smardt V-Class Water-Cooled Chiller in a Pony Express configuration**

## V-Class Water-Cooled

Smardt has brought its extensive experience in oil-free chiller development, sales and service into designing the V-Class — a range of large-capacity water-cooled chillers\* that deliver the highest level of reliability, outstanding efficiency and the lowest total cost of ownership.

V-Class chillers offer valuable benefits to owners and operators, such as ease of installation, simple streamlined operation and maintenance, and lower lifetime operating and maintenance costs. These advantages are the hallmark of Smardt chillers.

Your requirements for capacity, configuration, and turndown performance will help your Smardt representative assist with determining the best product fit for your project.

## Oil-Free Operation

Smardt oil-free centrifugal chillers use magnetic bearings and a variable-speed drive to deliver IPLV efficiencies that far surpass those of conventional oil-lubricated centrifugal, reciprocating, scroll and screw chillers.

Smardt utilizes totally oil-free Turbocor compressor technology, achieving the highest part-load efficiencies for our chillers and chilled water systems (including water-, air- and evaporatively-cooled applications).

Proprietary magnetic bearings replace

conventional oil-lubricated bearings. This eliminates the high friction losses, mechanical wear, and the higher-maintenance oil management systems that are inherent with conventional compressor designs.

Turbocor's primary moving part (the rotor shaft and impellers) is levitated during rotation by a digitally controlled magnetic bearing system. Position sensors at each magnetic bearing provide real-time feedback to the bearing control system, 120 times each revolution, ensuring constantly centered rotation.

The result is oil-free operation that delivers significant chiller energy savings compared with standard chillers, and provides an extended service life without the efficiency decrease seen in oil-based systems.

## Global Number One

Smardt is the industry leader in oil-free centrifugal chillers. Smardt pioneered oil-free centrifugal compressor technology to provide plant owners and operators a line of chillers that broke through industry norms of lifetime performance, energy conservation (reducing operating expenses), streamlined maintenance, and ease of operation.

From our first oil-free centrifugal chiller in 2002, more than 10,000 Smardt chillers, from 60 TR up to 3200 TR, are now saving money, energy and CO<sub>2</sub> emissions across the globe.


\* For applications 45-1600 TR (160-5625 kW) capacity, see Smardt's T-Class Water-Cooled Chillers.




## V-Class Water-Cooled Chillers



# V-Class Water-Cooled Chillers

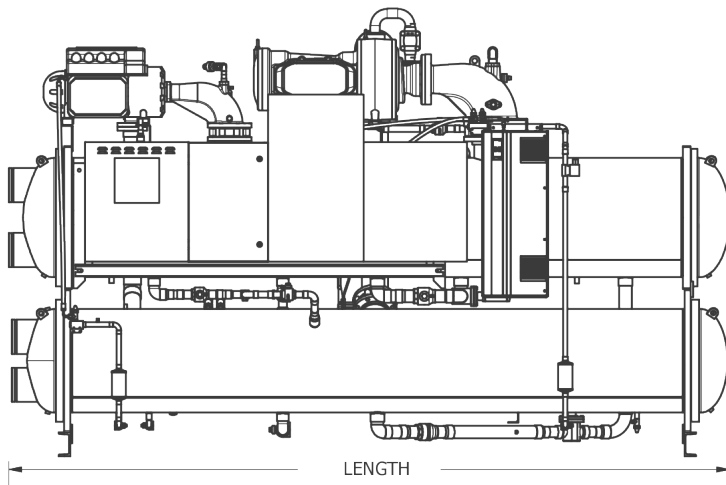

Side and front views of a Smardt V-Class Water-Cooled Chiller customized in a stacked configuration to fit a smaller footprint within a plant room. This example also illustrates a Pony Express configuration.

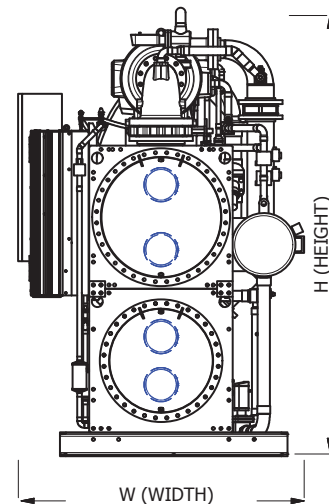

## Largest Capacity Chiller

Smardt V-Class chillers are designed for projects with ambitious kW/TR requirements. The world's largest installed oil-free chiller is a Smardt V-Class chiller, which serves a district cooling application.

## Turbocor VTT/VTX Compressor

The V-Class series of chillers can be equipped with 1–8 Turbocor VTT or VTX oil-free compressors. Turbocor VTT and VTX compressors boast outstanding full-load and part-load efficiencies. These oil-free compressors have low-sound output and use R134a refrigerant.\*



VTT Compressor



VTX Compressor

\*The Danfoss Turbocor VTX compressor can use R134a, R513A, R515B, and R1234ze refrigerants. A Smardt V-Class Water-Cooled Chiller using R513A, R515B, and R1234ze effectively becomes a G-Class Water-Cooled Chiller V-Series.

## V-Class Variations

The Smardt V-Class chiller is also available in two versions that are tailored for projects with special requirements. These are the Modular V-Class and the Pony Express V-Class (see illustration on page 5).

## Modular V-Class

Smardt's modular V-Class chillers are specially designed to enable safe and efficient transport in sections that fit within a typical freight elevator. This can avoid costly and time-consuming wall demolition and rebuilding that might otherwise be necessary for access.

## Pony Express V-Class

The Smardt Pony Express V-Class eliminates the need to have an additional low-load "pony chiller" for reduced-load situations such as nighttime or weekends. It is configured to extend the chiller's capabilities at full or part

load. This is achieved by utilizing a combination of multiple Turbocor VTT or VTX compressors running parallel with a single, smaller TTS compressor. This Pony Express compressor mix efficiently handles all types of loads. In a Pony Express configuration, the V-Class chiller uses R134a refrigerant.

## Turbocor TTS Compressor

The Turbocor TTS oil-free compressor, VFDs are built-in, and drives are internal to the machine. These oil-free compressors have low-sound output and with a V-Class chiller use R134a refrigerant.\*







TTS Compressor



\*The Danfoss Turbocor TTS compressor can use R134a or R513A refrigerants. A Smardt V-Class chiller using R513A effectively becomes a G-Class chiller.

# V-Class Water-Cooled Chillers

## Smardt Chiller Barrel Configuration Options

Standard Configuration	Configuration Options for Dimensional Considerations		Additional Options for Special Requirements
Narrow	Side-by-Side		Compact - Modular
 <p><b>1-4 compressors</b></p> <ul style="list-style-type: none"> <li>Stacked orientation</li> <li>Slim design</li> </ul>	 <p><b>3-5 compressors</b></p> <ul style="list-style-type: none"> <li>Barrels beside each other</li> <li>For short and wide layouts</li> <li>Panels mounted above condenser barrel</li> </ul>	 <p><b>6-8 compressors</b></p> <ul style="list-style-type: none"> <li>Barrels beside each other</li> <li>For short and wide layouts</li> <li>Panels mounted above condenser barrel</li> </ul>	 <p><b>1-8 compressors</b></p> <ul style="list-style-type: none"> <li>For tight fits</li> <li>Can be modular</li> <li>Dimensioned to fit through elevators and doors</li> </ul>

## Plant Room Access Options

Configuration Options for Plant Room Access Considerations	
Knocked-Down Kit	Split Barrel
 <p><b>1-8 compressors</b></p> <ul style="list-style-type: none"> <li>Fully-built chiller tested at factory</li> <li>Disassembly of components: compressors, control panel, and even complete disassembly if needed</li> </ul>	 <p><b>1-8 compressors</b></p> <ul style="list-style-type: none"> <li>Ideal for applications with limited plant room area</li> </ul>

**Smardt V-Class water-cooled chillers offer barrel configuration flexibility for applications with restricted footprints or access challenges.**

### Multiple Configurations

Smardt can configure your V-Class chiller to fit any footprint or height restriction, with multiple barrel configurations available.

### Extended Service Life

The V-Class chiller is designed for a service life of 25 years.

### Chiller Options

Options for Smardt's V-Class chillers include our integrated pump packages, economizer, and Smardt Restart.

Smardt Restart ensures that in the event of a power failure, your Smardt chiller is back on line as quickly as 45 seconds. Chilled water supply for critical applications is not impacted by intermittent power loss, eliminating the need for additional thermal storage. The start-up mode includes additional motor and surge protection.

### Applications

Energy conscious plant owners and operators want optimized performance with savings over the life of the chiller. Smardt's V-Class Water-Cooled Chillers support critical-load applications in a variety of markets, including commercial, data center, pharmaceutical, hospital, higher education, district cooling, hotels, malls, and manufacturing.

### Highlights


- Largest capacity range in oil-free water-cooled chillers.
- Class leading part-load efficiencies, achieving optimum IPLV in total capacity range.
- Typically smaller footprint than chillers of comparable capacity.
- Responsive chilled water control under all conditions.
- Inbuilt redundancy with multiple compressors.
- Designed for ease of maintenance and serviceability, featuring field-serviceable compressors.
- Smardt quality, acceptance tested and pre-commissioned prior to delivery ensuring trouble-free commissioning and start-up on every project.

# V-Class Water-Cooled Chillers

Smardt's V-Class Water-Cooled Chillers with full-load capacities of units with R134a refrigerant, ranges from 300 to 3600 TR (1055 to 12660 kW)

## Representative Models

Smardt can customize your V-Class Water-Cooled Chiller to meet your project's needs and specifications. The models included in this capacity cart are considered representative of the V-Class Water-Cooled Chiller , but selection is not limited to these specific models. Your Smardt representative can provide capacity data for your project.

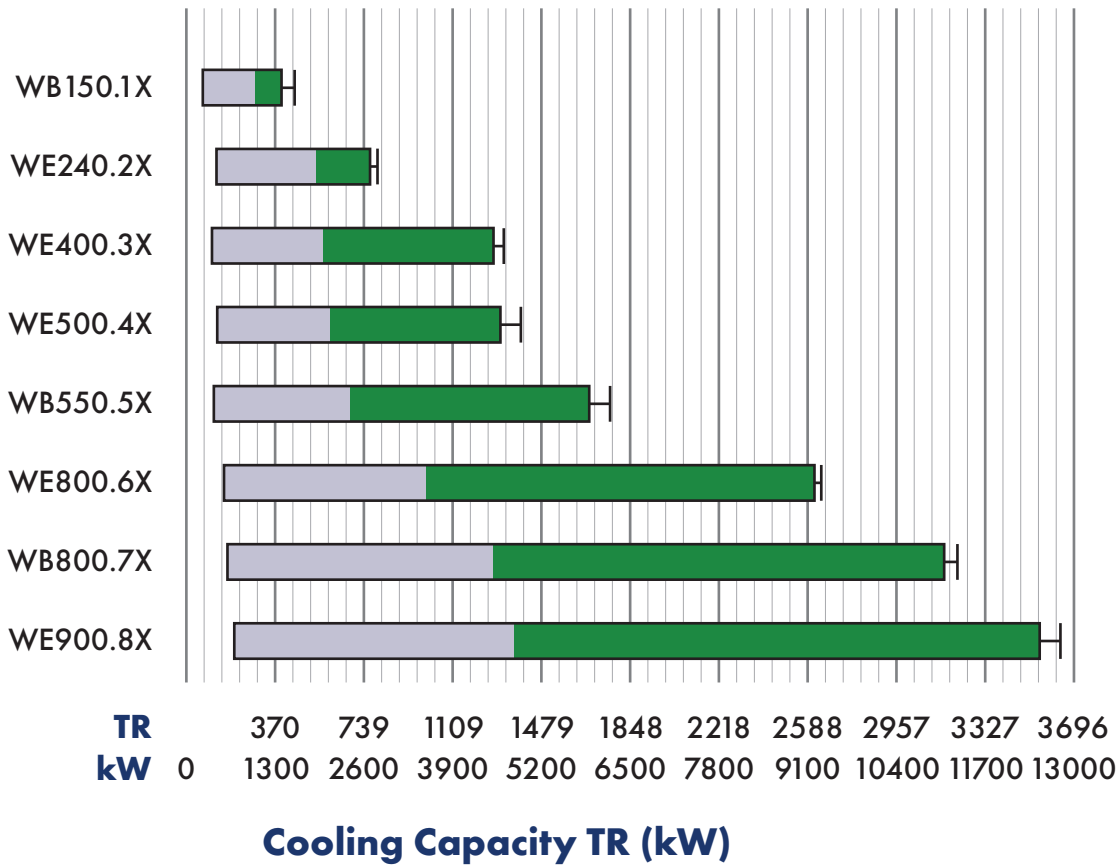


Note: Available cooling capacity will vary with operating conditions and chiller configuration. Capacities shown are based on standard AHRI conditions.



# V-Class Water-Cooled Chillers

## Model Number Nomenclature

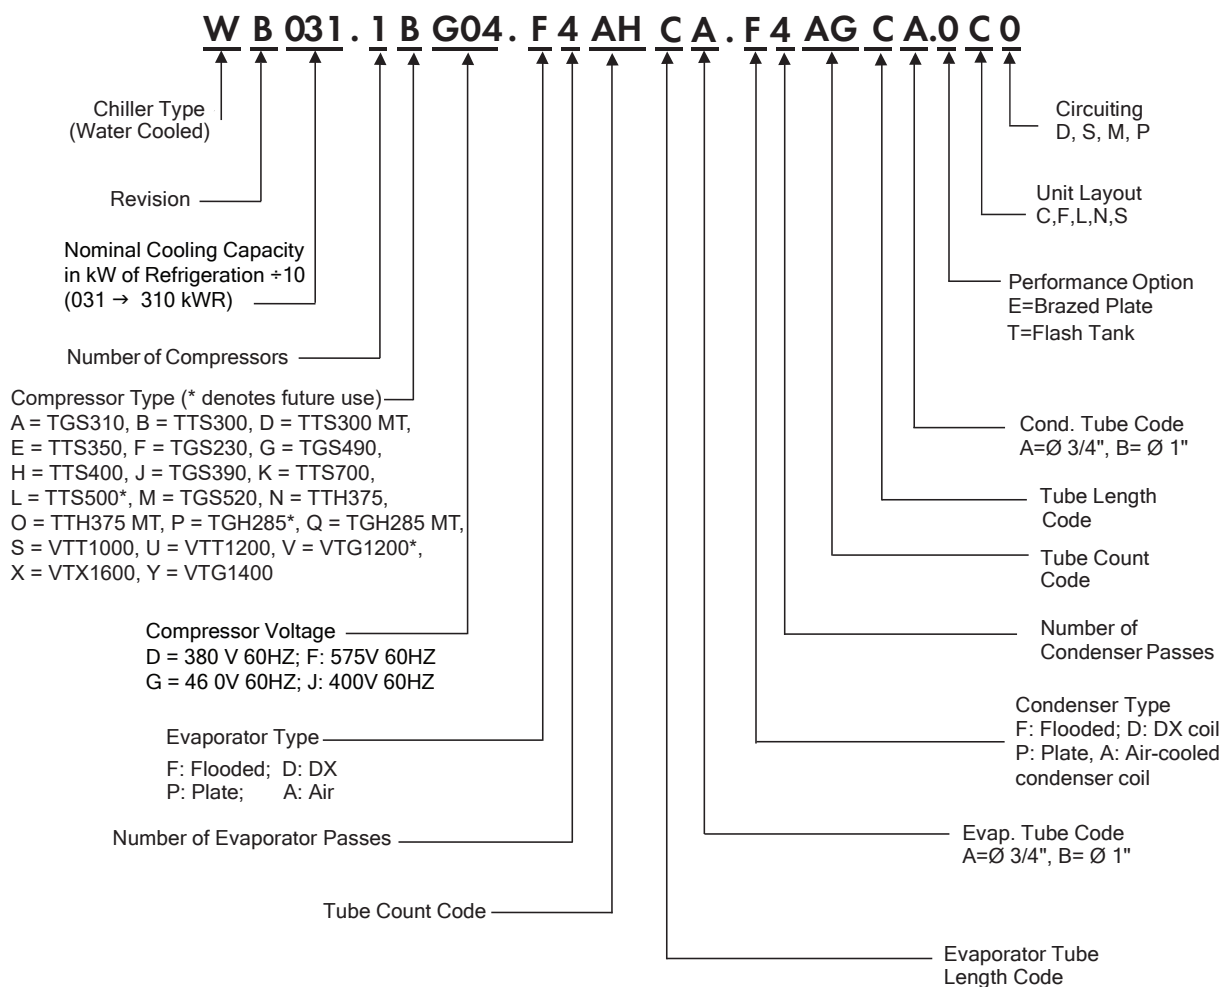

## Global reach, single focus

Smardt is both the pioneer and world-leader in oil-free centrifugal chillers, with production facilities in Canada (Montreal area), Australia (Melbourne area), United States (Plattsburgh, New York), Germany (Stuttgart area), and China (Guangzhou and Nanjing).

Smardt service networks extend across the globe to monitor and support the world's largest installed base of oil-free high-efficiency chillers, with more than 10000 chillers installed globally.



### AMERICAS

#### Canada

**Smardt Chiller Group Inc.**  
1800 Trans-Canada Highway  
Dorval, Quebec H9P1H7  
T +1 514 426 8989  
E sales.na@smardt.com

#### USA

**Smardt Chillers Inc.**  
22 Colorado Street, Bldg 2815  
Plattsburgh, NY 12903  
T +1 518 324 5741  
E sales.na@smardt.com

#### Brazil

**Mecalor Solutions (licensed partner)**  
Rua da Bandeira, 219-Novo Mundo Park  
São Paulo, Brazil  
T +55 11 2188 1700  
E sales@mecalor.com

### ASIA PACIFIC

#### Australia

**Smardt Chiller Pty Ltd**  
144 Colchester Road  
Bayswater North VIC 3153  
T +61 3 9761 7905  
E sales.au@smardt.com

#### China

**Guangzhou Smardt Chillers Manufacturing Co. Ltd**  
Mei Xing Industrial Park  
No. 30 Dong Zhong Road ETDD  
Guangzhou  
T +86 20 8205 7161  
E sales.cn@smardt.com

**Guangzhou Smardt Chillers Manufacturing Co. Ltd, Nanjing Branch No. 2,**  
Hengxiang Road, Qixia Economic and Technological Development Zone,  
Nanjing, China  
T +86 25 8532 6977  
E sales.cn@smardt.com

**TICA Smardt Hong Kong Ltd**  
11/F, The Bedford, 91-93 Bedford Road  
Tai Kok Tsui, Kowloon, Hong Kong  
T +852 2772 8448  
E hk.info@smardt.com

#### Singapore

**Smardt Chillers Pte Ltd**  
438A Alexandra Road #08-11  
Alexandra Technopark 119967  
T +65 6273 1120  
E sales.as@smardt.com

### EMEA

#### Germany

**Smardt-OPK Chillers AG**  
Bahnhofstraße 74  
D73240 Wendlingen  
T +49 7024 79429 0  
E sales.eu@smardt.com  
www.opk.de

#### United Kingdom

**Smardt Chiller UK**  
10A Burrell Way, Thetford,  
Norfolk IP24 3RW  
T +44 1842 824830  
E sales.uk@smardt.com



[www.smardt.com](http://www.smardt.com)

Smardt has exercised its best efforts to ensure that the information contained in this document is correct at time of printing. However, no warranty, reliability or accuracy is given with respect to the information contained herein, and Smardt is not and shall not be responsible for any error or omission, or liable for the correctness or suitability of the information given. All brand names and product names used in this manual are trademarks, registered trademarks, or trade names of their respective holders.

© 2022, Smardt Chiller Group Inc. All rights reserved. 01/2022