

SMARTD

INNOVATION ENGINEERED,
ENERGY OPTIMISED

AeroPure™ Air-Cooled Chiller



Cooling Capacity
211 kW – 2500 kW

Available Refrigerants
R134a, R513A,
R515B, R1234ze





About Smardt

**Global innovation in oil-free technology,
products built for high-performance
environments.**



Smardt is a global leader in oil-free centrifugal chillers, delivering energy-efficient solutions with ultra-low lifecycle costs. With over 12,000 units installed worldwide, we support some of the most demanding environments from hospitals and commercial buildings to manufacturing and mission-critical facilities.

Our chillers are powered by magnetic bearing technology and a Global Controls Platform, offering reliability, low maintenance, and future-ready performance.

As buildings evolve, we continue to reduce energy usage, support global compliance requirements, and help customers move towards more sustainable operations.



AeroPure™

Air-Cooled Chiller AF Series

AeroPure™ AF series continues Smardt's legacy of oil-free innovation, with over 12,000 installations worldwide powered by magnetic bearing compressors, **AeroPure™ AF series** is built to perform in high-demand, uptime-critical environments.

Whether for comfort or process cooling, **AeroPure™ AF series** is your go-to choice for performance, efficiency, and reliability.

Engineered to perform
Designed for reliability



READY TO SHIP.
READY TO PERFORM.



Tailored for your environment

AeroPure™ AF series is engineered to meet the specific needs of various demanding operating conditions:

Process Cooling / Data Centers

- Built to meet uptime, load variability, and redundancy needs
- Clean rooms, telecoms, light manufacturing, and high-density racks
- Delivers rapid system recovery, with compressor restart in as little as 30 seconds following short power interruptions

Comfort Cooling

- Ideal for healthcare, government, hospitality, manufacturing, educational institutions, offices and retail
- Supports quiet operation and easy rooftop or yard installation
- Seamless design integrates into modern building architecture

Installation advantages



Quiet operation for noise-sensitive zones



Designed for standard 20' or 40' high cube containers



Optimized unit height for space-limited rooftops and equipment yards



Simplified rigging, handling, and freight logistics



Key features

1

Supports Low-GWP Refrigerants including R513A, R515B, and R1234ze.

2

Up to **16.0 EER (Full Load)** or **25.9 IPLV** depending on model and application.

3

Fast Restart* resumes compressor operation in as little as 30 seconds following brief power interruptions, without requiring manual reset

4


Redundant Compressor Configuration allows continued operation, even with only one compressor running

5

Operating Range from -28.9°C to 54.4°C with extended options, meeting both low and high ambient requirements for mission-critical environments

6

Global Certifications meets AHRI, CE, ETL, ASHRAE 15, MEPS, and other international standards

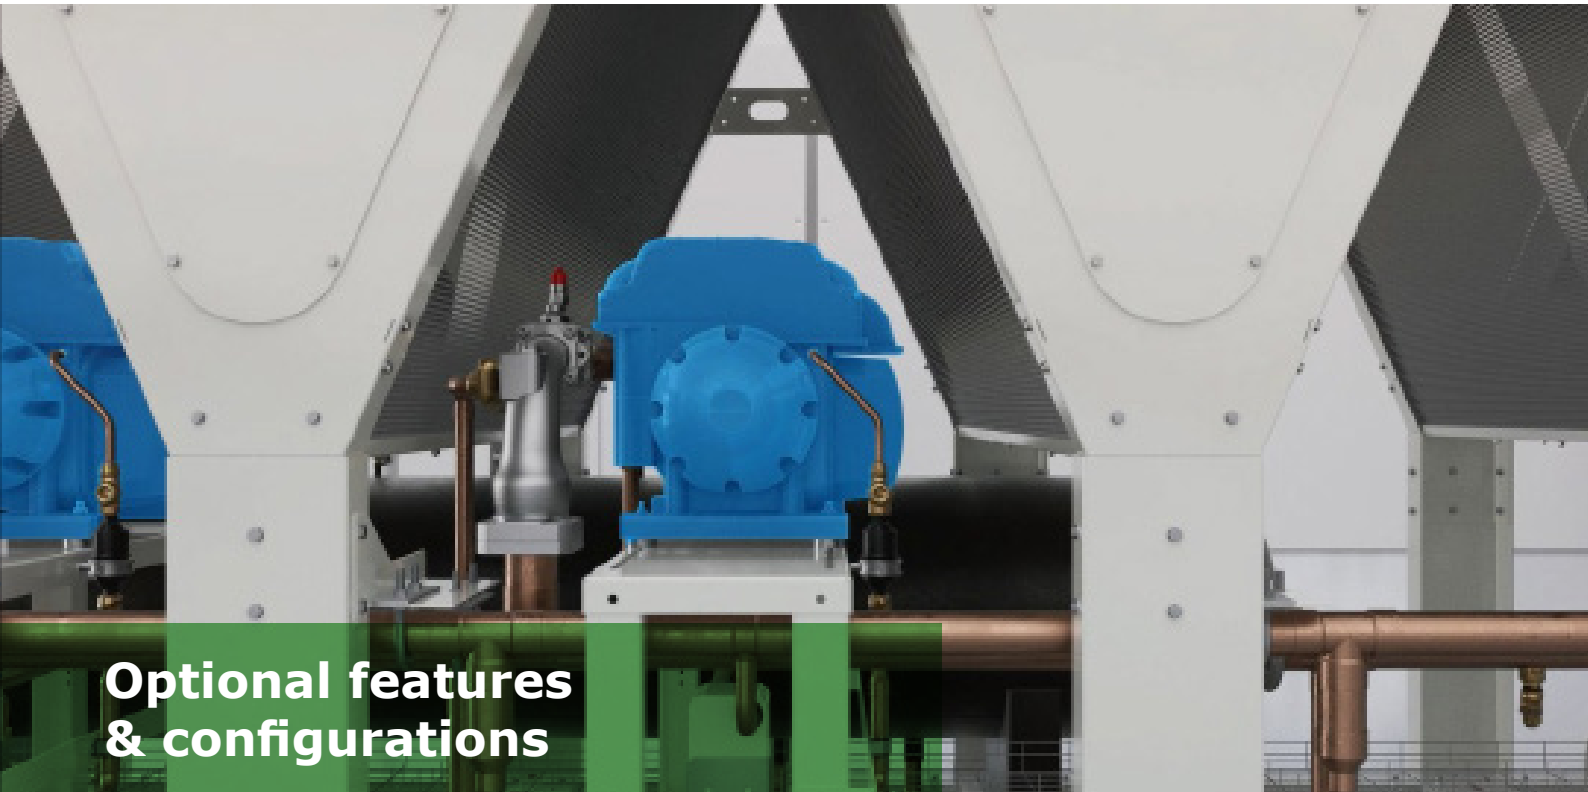

Optional features & configurations


AeroPure™ AF series chillers offer a range of optional features designed to support specific project requirements, improve operational flexibility, and enhance system performance.

These options allow customization based on application needs, environmental conditions, and operational priorities.

Available options include:

- Total Harmonic Distortion Current (THDi) Filter
- ATS (Automatic Transfer Switch)
- EC fans as standard with normal and extended external pressure
- Double refrigerant circuit
- Remote access capability
- Smardt Cool optimization package
- Heat exchanger protective coatings
- Low ambient temperature kit

* By integrating the Smardt Fast Restart feature into water- or air-cooled chillers, operation resumption (compressor RPM > 1) can be achieved in as little as 30 seconds following brief power interruptions. In typical field conditions, compressor speed resumption (achieving 90% of the compressor's pre-outage RPM) can be achieved in as little as 110 seconds following brief power interruptions depending on load, operating conditions, outage duration in the plantroom, etc.

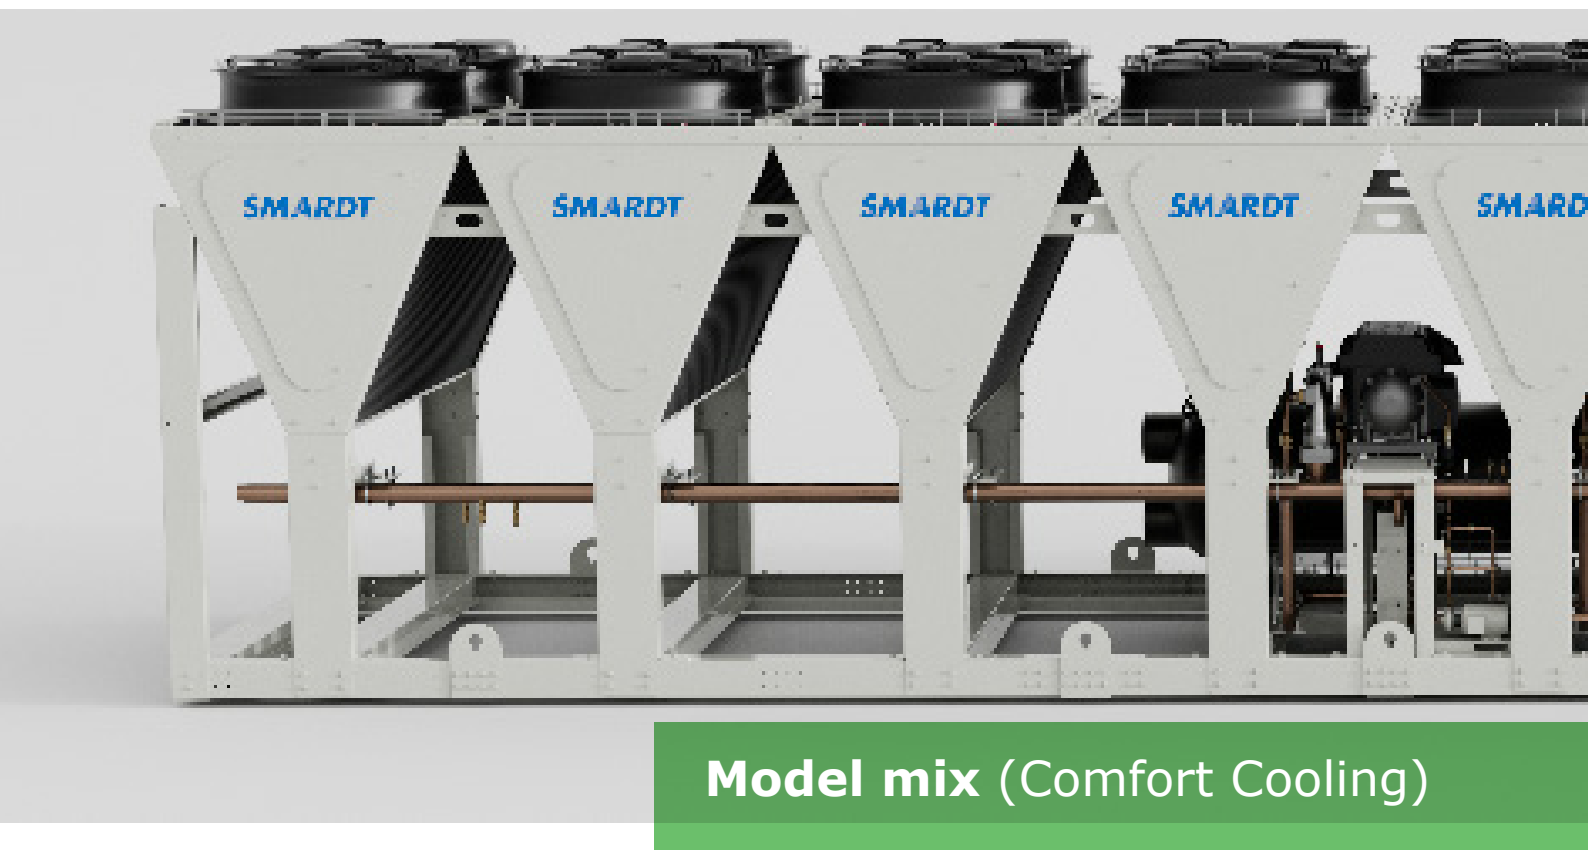

4 Total new compressors help optimize our range

R134a/R513a models (315kW to 1425kW)


Model Number	Nominal Capacity
AF060.2B.F22.10.S3	630 kW
AF060.2D.F22.10.S3	630 kW
AF070.2N.F22.12.S3	731 kW
AF070.2O.F22.12.S3	731 kW
AF080.2E.F24.12.S3	851 kW
AF090.2I.F26.14.S3	949 kW
AF090.3B.F26.14.S3	946 kW
AF090.3D.F26.14.S3	946 kW
AF105.3N.F24.16.S3	1094 kW
AF105.3O.F24.16.S3	1094 kW
AF120.3E.F26.18.S3	1276 kW
AF135.3I.F26.20.S3	1425 kW

Additional 2 compressors have been added to this range

R1234ze/R515b models (220kW to 1320kW)

Model Number	Nominal Capacity
AF050.2P.F26.08.S4	520 kW
AF050.2Q.F26.08.S4	520 kW
AF060.2A.F20.10.S4	601 kW
AF060.3F.F22.10.S4	661 kW
AF070.2R.F22.10.S4	700 kW
AF075.3P.F24.12.S4	781 kW
AF075.3Q.F24.12.S4	781 kW
AF080.2G.F24.14.S4	870 kW
AF090.3A.F26.14.S4	900 kW
AF105.3R.F26.16.S4	1052 kW
AF120.3G.F26.20.S4	1319 kW

Additional 2 compressors have been added to this range

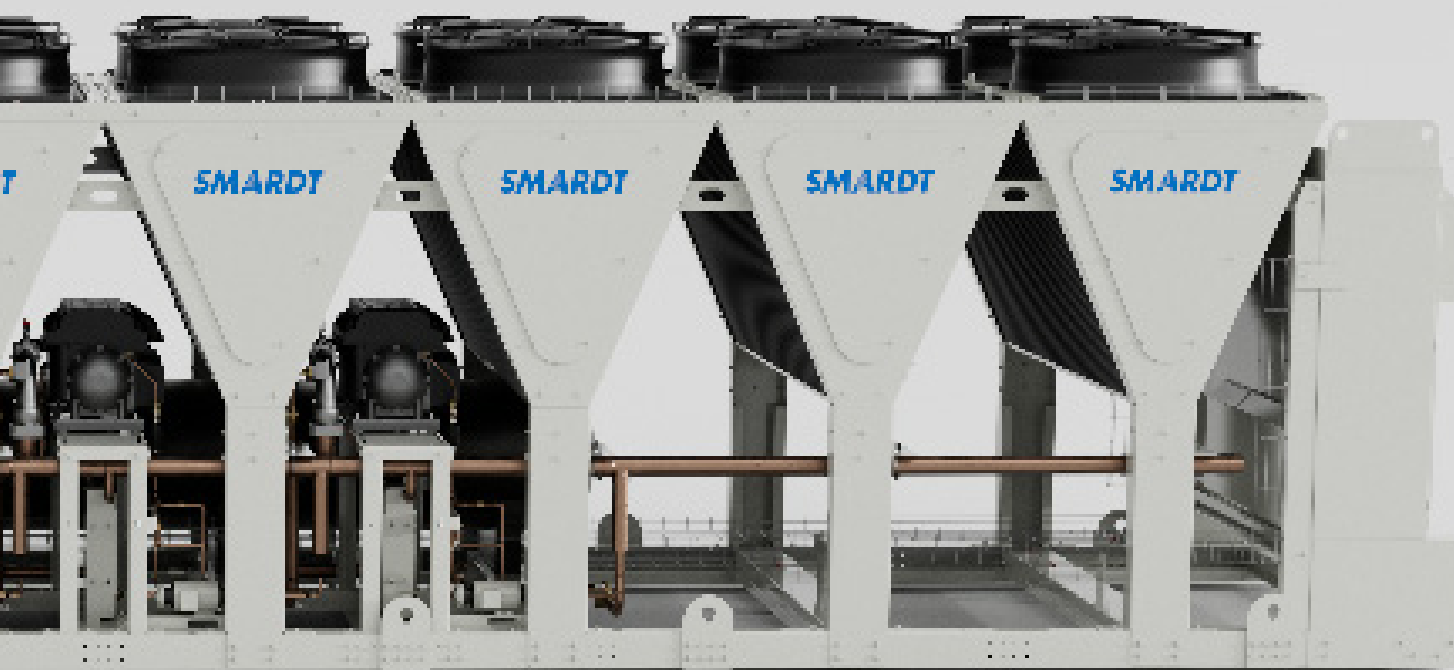

Model mix (Data Center)

R513A/R134a models

OAT	52 °C
EWT	36 °C
LWT	24 °C

Model Number	Nominal Capacity
AF060.2P.F22.12.S4	600 kW
AF070.2N.F24.14.S3	770 kW
AF080.2R.F26.14.S4	820 kW
AF090.3P.F26.12.S3	900 kW
AF105.3N.F26.20.S3	1155 kW

Model Number	Nominal Capacity
AF120.4P.F22.24.S4	1200 kW
AF120.3R.F20.20.S4	1230 kW
AF140.4N.F24.28.S3	1540 kW
AF160.4R.F26.28.S4	1640 kW

OAT	45 °C
EWT	31 °C
LWT	24 °C

R1234ze/R515b models


Model Number	Nominal Capacity
AF070.2P.F24.12.S4	700 kW
AF070.2R.F18.14.S4	780 kW
AF080.2B.F18.14.S3	820 kW
AF080.2A.F18.14.S4	840 kW
AF090.2N.F20.16.S3	920 kW
AF105.3P.F22.18.S4	1050 kW
AF110.2E.F22.18.S3	1120 kW
AF105.3R.F24.20.S4	1170 kW
AF120.2I.F22.20.S3	1220 kW
AF120.3B.F24.20.S3	1230 kW

Model Number	Nominal Capacity
AF120.2G.F22.20.S4	1250 kW
AF120.3A.F24.20.S4	1260 kW
AF140.4P.F24.24.S4	1400 kW
AF140.4R.F18.28.S4	1560 kW
AF160.4B.F18.28.S3	1640 kW
AF160.4A.F18.28.S4	1680 kW
AF180.4N.F20.32.S3	1840 kW
AF220.4E.F22.36.S3	2240 kW
AF240.4I.F22.40.S3	2440 kW
AF240.4G.F22.40.S4	2500 kW



Driving lifecycle performance

Smardt delivers a comprehensive suite of services designed to maximize the performance, reliability, and longevity of your HVAC systems. With global experience across more than 12,000 chiller installations, we support customers throughout the entire equipment lifecycle from start-up to optimization and beyond.

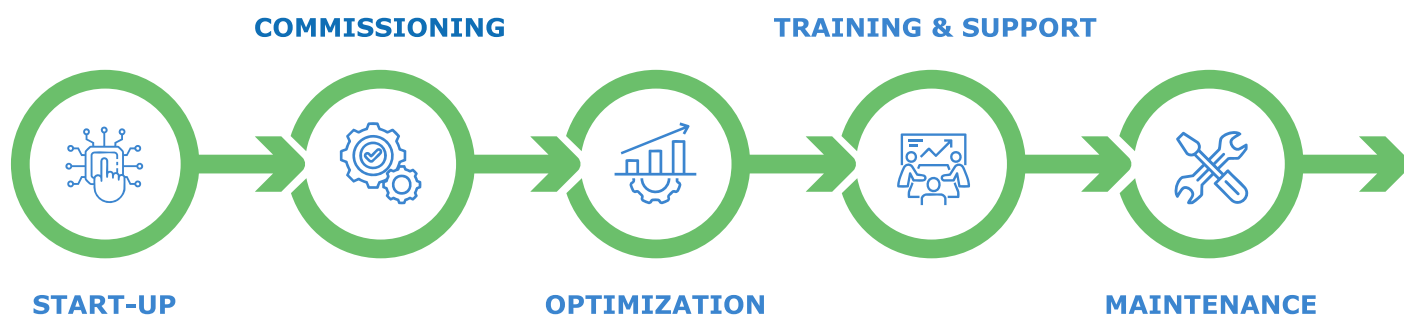

Core benefits



Improved system reliability



Reduced operational risks & costs



Regulatory & sustainability compliance



Enhanced energy efficiency



Process-driven optimization

We help you get the most from your central plant systems with a data-driven approach that cuts energy use, lowers costs, and boosts performance.

It starts with an energy audit to pinpoint inefficiencies, followed by tailored solutions built around your plant's needs. Often this includes our **Central Plant Energy Conservation System** (CPECS) a smart platform that dynamically manages equipment for maximum efficiency.

From assessment to full integration, we deliver seamless projects backed by proven results in commercial, institutional, and mission-critical facilities. The outcome: measurable savings, stronger reliability, and greater visibility supporting your efficiency



System capabilities



Optimized energy performance



Enhanced system control & transparency



Lower operating costs



Improved reliability with seamless execution



AeroPure™

Engineered to perform Designed for reliability

**With a suite of highly efficient and dependable
HVAC solutions, we are your trusted partner
wherever you may be.**

Americas

Canada

Montreal (Dorval)
T +1 514 426 8989
E sales.na@smardt.com

USA

Plattsburgh, NY
T +1 518 324 5741
E sales.na@smardt.com

South America

Mecalor Solutions
(licensed partner)
São Paulo, Brazil
T +55 11 2188 1700
E vendas@mecalor.com

EMEA

Germany

Stuttgart (Wendlingen am Neckar)
T +49 7024 79429 0
E sales.emea@smardt.com

France

Nantes
T +33 1 47 55 74 30
E sales.emea@smardt.com

Greater Asia Pacific Region

Australia

Melbourne (Bayswater North)
T +61 3 9761 7905
E mel.sales@smardt.com

Singapore

Singapore
T +65 6273 1120
E sales.gar@smardt.com

Malaysia

Kuala Lumpur
T +603 8060 1493
E sales.gar@smardt.com

Greater China and Northeast Asia

China

Guangzhou
T +86 20-8205 7161-8041
E sales.cn@smardt.com

China

Nanjing
T +86 25 8532 6977
E sales.cn@smardt.com

Hong Kong SAR

Kowloon
T +852 2772 8448
E hk.info@smardt.com

SMARDT

This publication contains information proprietary and confidential to TICA-Smardt Chiller Group Inc. and its affiliated companies "Smardt". Any reproduction, disclosure or unauthorized use of this publication is expressly prohibited without written permission from Smardt. All brand and product names are trademarks of their respective holders.

TICA-Smardt Chiller Group Inc, ©2025. All rights reserved. Published: January 2025

Subject to design conditions and select refrigerants.

